




Software Installation Instructions

LA GARD ComboGard Pro

39E Electronic Lock



IMPLEMENTATION PACKAGE

The ComboGard Pro Software implementation package includes:

- · 707012 ComboGard Pro Software Install CD
- 42145 Programming/Audit cable (3125 Entry Device)
- · 43097 Programming/Audit cable (for 3190, 3750-K, and 8130 Entry Devices)
- 707010 USB Interface Adapter (or 42150 Serial Interface Adapter)

IMPORTANT NOTE: The system driver for the USB Interface Adapter will be installed after the application software. DO NOT insert the adapter into the PC until the software installation is complete.

If any of the above items are missing, contact your point of sale.

SYSTEM REQUIREMENTS

Minimum hardware and software requirements for the ComboGard Pro Software:

- IBM compatible PC (Intel® Pentium® 4 or compatible processor) capable of running Windows® with an available USB or serial port
- 512 MB RAM (1GB preferred. Refer to your operating system requirements.)
- · CD-ROM or DVD-ROM Drive
- Hard Disk Drive with at least 6.5 MB available
- Super VGA (1,024x768) or higher-resolution video adapter and monitor
- Windows 7 Professional 32-bit or 64-bit
- · Microsoft Mouse or compatible pointing device

NOTE: Adobe® Reader requires an additional 335 MB of available hard-disk space and Microsoft Internet Explorer 6.0 or higher.

SOFTWARE INSTALLATION AND SETUP

1. Insert the ComboGard Pro Install CD into the appropriate CD-ROM or DVD-ROM drive of the PC.

NOTE: Do not remove the Installation CD until instructed to do so.

- 2. The Install CD is set to AutoRun. If AutoRun does not initiate, complete the following steps:
 - a. Select the **Start** icon in the lower left of the Windows screen.
 - b. Select the **Run** icon from the Windows menu. The Run Window will be displayed (Figure 1).




Figure 1.

- c. If necessary, change the path to point to the drive being used to install the software.
- d. Click on the **OK** button.

NOTE: An alternate method to initiate the Installation Browser is to right-click on the START button, select Explore to open your CD-ROM drive, and then select Launch.exe.

The main menu of the Installation Browser will display three Menu Options: **Install Software**, **Product Documentation**, and **Contact Us** (Figure 2).

Install Software

This menu option allows the user to install the ComboGard Pro software and the driver for the USB Interface Adapter, if required.

Product Documentation

This menu option allows access to the product documentation for the system. All instructions for the ComboGard Pro lock system are available on the Install CD in PDF format. Adobe® Reader is required to view and print the documents and is included on the Install CD.

NOTE: The latest versions of LA GARD documentation are also available for download at www.kaba-mas.com.



Figure 2.

Contact Us

This menu option displays contact information for the LA GARD brand.

UPGRADE FROM OLD SOFTWARE

If a previous version of the ComboGard Pro Setup software or the LGView 3X software is installed on your computer, consider the items below before converting to the new ComboGard Pro software. If no previous software versions are installed, move to the software installation section(s) of this document.

1. Lock Setup Files

Lock setup files from the previous version of ComboGard Pro Setup software may not transfer to the new software system.

2. Use of Previous Hardware

The new Setup and Auditing software does support the Serial Interface device (P/N 42150), but the new USB Adapter is recommended.

3. Removal of Old Software

It is recommended that the old software be removed after installing the new software and completing any required file transfers or lock setup configurations. Detailed instructions on how to perform this process are provided in the **REMOVE PREVIOUSLY INSTALLED SOFTWARE** section of this document.

INSTALL COMBOGARD PRO SOFTWARE AND USB DRIVER

From the main menu of the Install Browser, select the **Install Software** menu item. The Install Software menu will be displayed (Figure 3).

From this menu the ComboGard Pro Setup software can be installed. The FTDI USB Driver also needs to be installed if the USB Interface Adapter is used to program or audit the lock.

INSTALL COMBOGARD PRO SETUP

To install the ComboGard Pro Setup Software, complete the following steps:



Figure 3.

1. Select the **Install CGP Setup** menu item.

The ComboGard Pro Setup screen will be displayed (Figure 4). The Setup Wizard is a Windows program that will guide you through the rest of the setup process.



Figure 4.

2. Click on the **Next>** button to continue.

The Software License Agreement Screen will be displayed (Figure 5).



Figure 5.

- 3. Read the Software License Agreement, and then click on "I Agree" button to accept the terms of the agreement.
- 4. Click on the **Next>** button to continue.

The Select Installation Folder window is displayed (Figure 6) to allow you to select the program folder where the ComboGard Pro Setup Software will be installed.

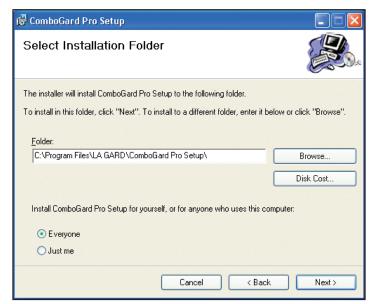


Figure 6.

5. Select the program folder to which the ComboGard Pro Setup Software program will be added.

NOTE: The default installation directory is shown. To install the ComboGard Pro Setup Software in another directory, click on the Browse button and select the new path. Also, the default value for who can use the software is "Everyone". To restrict the software for use by only yourself, select "Just Me".

6. Click on the **Next>** button to add the program to the designated folder. The Confirm Installation screen will be displayed (Figure 7).

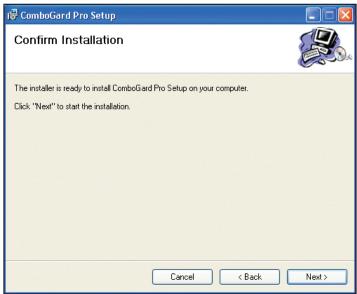


Figure 7.

7. Click on the **Back>** button to change the installation settings, or click on the **Next>** button to install the program with the designated settings.

The installation status screen will be displayed and will show several different status messages as the installation

progresses (Figure 8).



Figure 8.

The ComboGard Pro Setup Software program will be added to the Windows Program Menu Folder, and a desktop shortcut icon will be created.

The **Installation Complete** screen is then displayed indicating that the ComboGard Pro Setup Software program has been successfully installed (Figure 9).

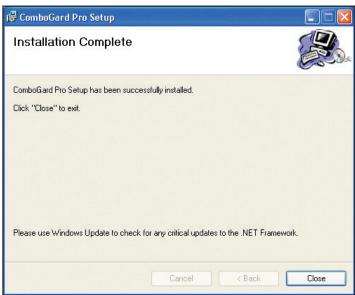


Figure 9.


8. Click on Close.

The ComboGard Pro Setup Software installation is now complete.

INSTALL FTDI USB DRIVER & ADAPTER

To use the USB Interface Adapter (P/N 707010), complete the following steps to load the required FTDI driver and install the hardware device:

Select the Install FTDI USB Driver menu item to start the driver installation process.
 A series of windows will be displayed as the installation progresses (Figure 16). The cascade of windows will close automatically once the driver installation is completed.

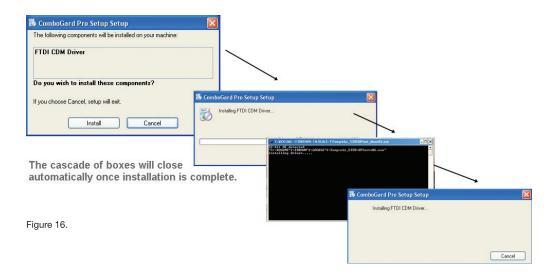

- 2. Insert the USB Adapter into an available USB port on the PC.

 The Found New Hardware message window will open and will display various messages as the new hardware device is installed. Once the installation is complete, the message window will automatically close.
- 3. Select **Menu** to return to the Main Menu.
- 4. Select **Exit** to exit the Installation Browser.

- 1. Copy audit files from the old ComboGard software system. The old default location is:
 - C:\Program Files\LgView3x\Audit\
- 2. Transfer (paste or copy) the old audit files to the new default location for your Operating System, defined as follows: Windows 7 -> C:\Users\Public\Public Documents\ComboGard Pro\

REMOVE PREVIOUSLY INSTALLED SOFTWARE

The old version(s) of the software should be removed after the installation of the new software, to prevent possible software conflicts. To remove the old software complete the following steps:

- 1. Select the **Start** icon from the Windows task bar.
- 2. Select the **Settings** menu item.
- 3. Select the Control Panel menu item.
- 4. Select Add or Remove Programs.

The Add or Remove Programs screen is displayed.

5. To delete a previously installed version of the ComboGard Pro Software, select the **ComboGard PRO Setup** program item (Figure 20) and then click on **Change/Remove**. (DO NOT delete the new version that is defined with a similar name.) The program will be deleted from the list.

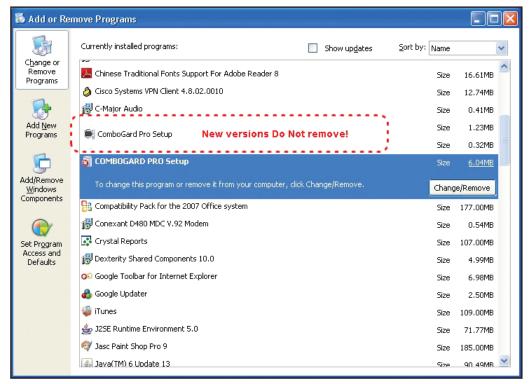


Figure 20.